

P/N: T199745

Copyright

© 2018, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

Document identity

Publ. No.: T199745

Commit: 53433

Language:

Modified: 2018-11-07

Formatted: 2018-11-07

Website

<http://www.flir.com>

Customer support

<http://support.flir.com>

Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions.



General description

The 7° lens is a popular accessory that provides outstanding magnification of details at long distances. It is ideal for small or distant targets such as overhead power lines.

Imaging and optical data

Field of view (FOV)	7° × 5.3° (8.7° diagonally)
Minimum focus distance	3.0 m (9.8 ft.)
Focal length	142 mm (5.59 in.)
Spatial resolution (IFOV)	0.12 mrad
Lens identification	Automatic
F-number	1.2
Number of lenses	5 (4 asph)
Distortion	< 2%

Physical data

Weight	1.97 kg (4.34 lb.)
Weight, lens	1.67 kg (3.68 lb.)
Size (L × D)	181 × 140 mm (7.13 × 5.51 in.), excluding support
Front lens diameter	122 mm (4.80 in.)

Shipping information

Packaging, type	Cardboard box
List of contents	<ul style="list-style-type: none"> • Lens • Lens case • Front lens cap • Rear lens cap • Mounting support • Lens mounting instructions
Packaging, weight	2.94 kg (6.48 lb.)
Packaging, size	350 × 250 × 250 mm (13.8 × 9.84 × 9.84 in.)
EAN-13	7332558015742
UPC-12	845188017729
Country of origin	Sweden

Compatible with the following products:

- 72502-0501; FLIR T1010 12°
- 72502-0502; FLIR T1010 28°



IR lens, $f=142$ mm (7°) with case and mounting support


P/N: T199745

© 2018, FLIR Systems, Inc.

#T199745; r. 53433;

- 72502-0503; FLIR T1010 45°
- 72501-0101; FLIR T1020 12°
- 72501-0102; FLIR T1020 28°
- 72501-0104; FLIR T1020 28° and 12°
- 72501-0105; FLIR T1020 28° and 45°
- 72501-0106; FLIR T1020 28° , 12° , and 45°
- 72501-0103; FLIR T1020 45°
- 72501-0201; FLIR T1030sc 12°
- 72501-0202; FLIR T1030sc 28°
- 72501-0203; FLIR T1030sc 45°
- 72501-0301; FLIR T1040 12°
- 72501-0302; FLIR T1040 28°
- 72501-0303; FLIR T1040 45°
- 72501-0401; FLIR T1050sc 12°
- 72501-0402; FLIR T1050sc 28°
- 72501-0403; FLIR T1050sc 45°

IR-LENS 7° (f=142mm) incl support

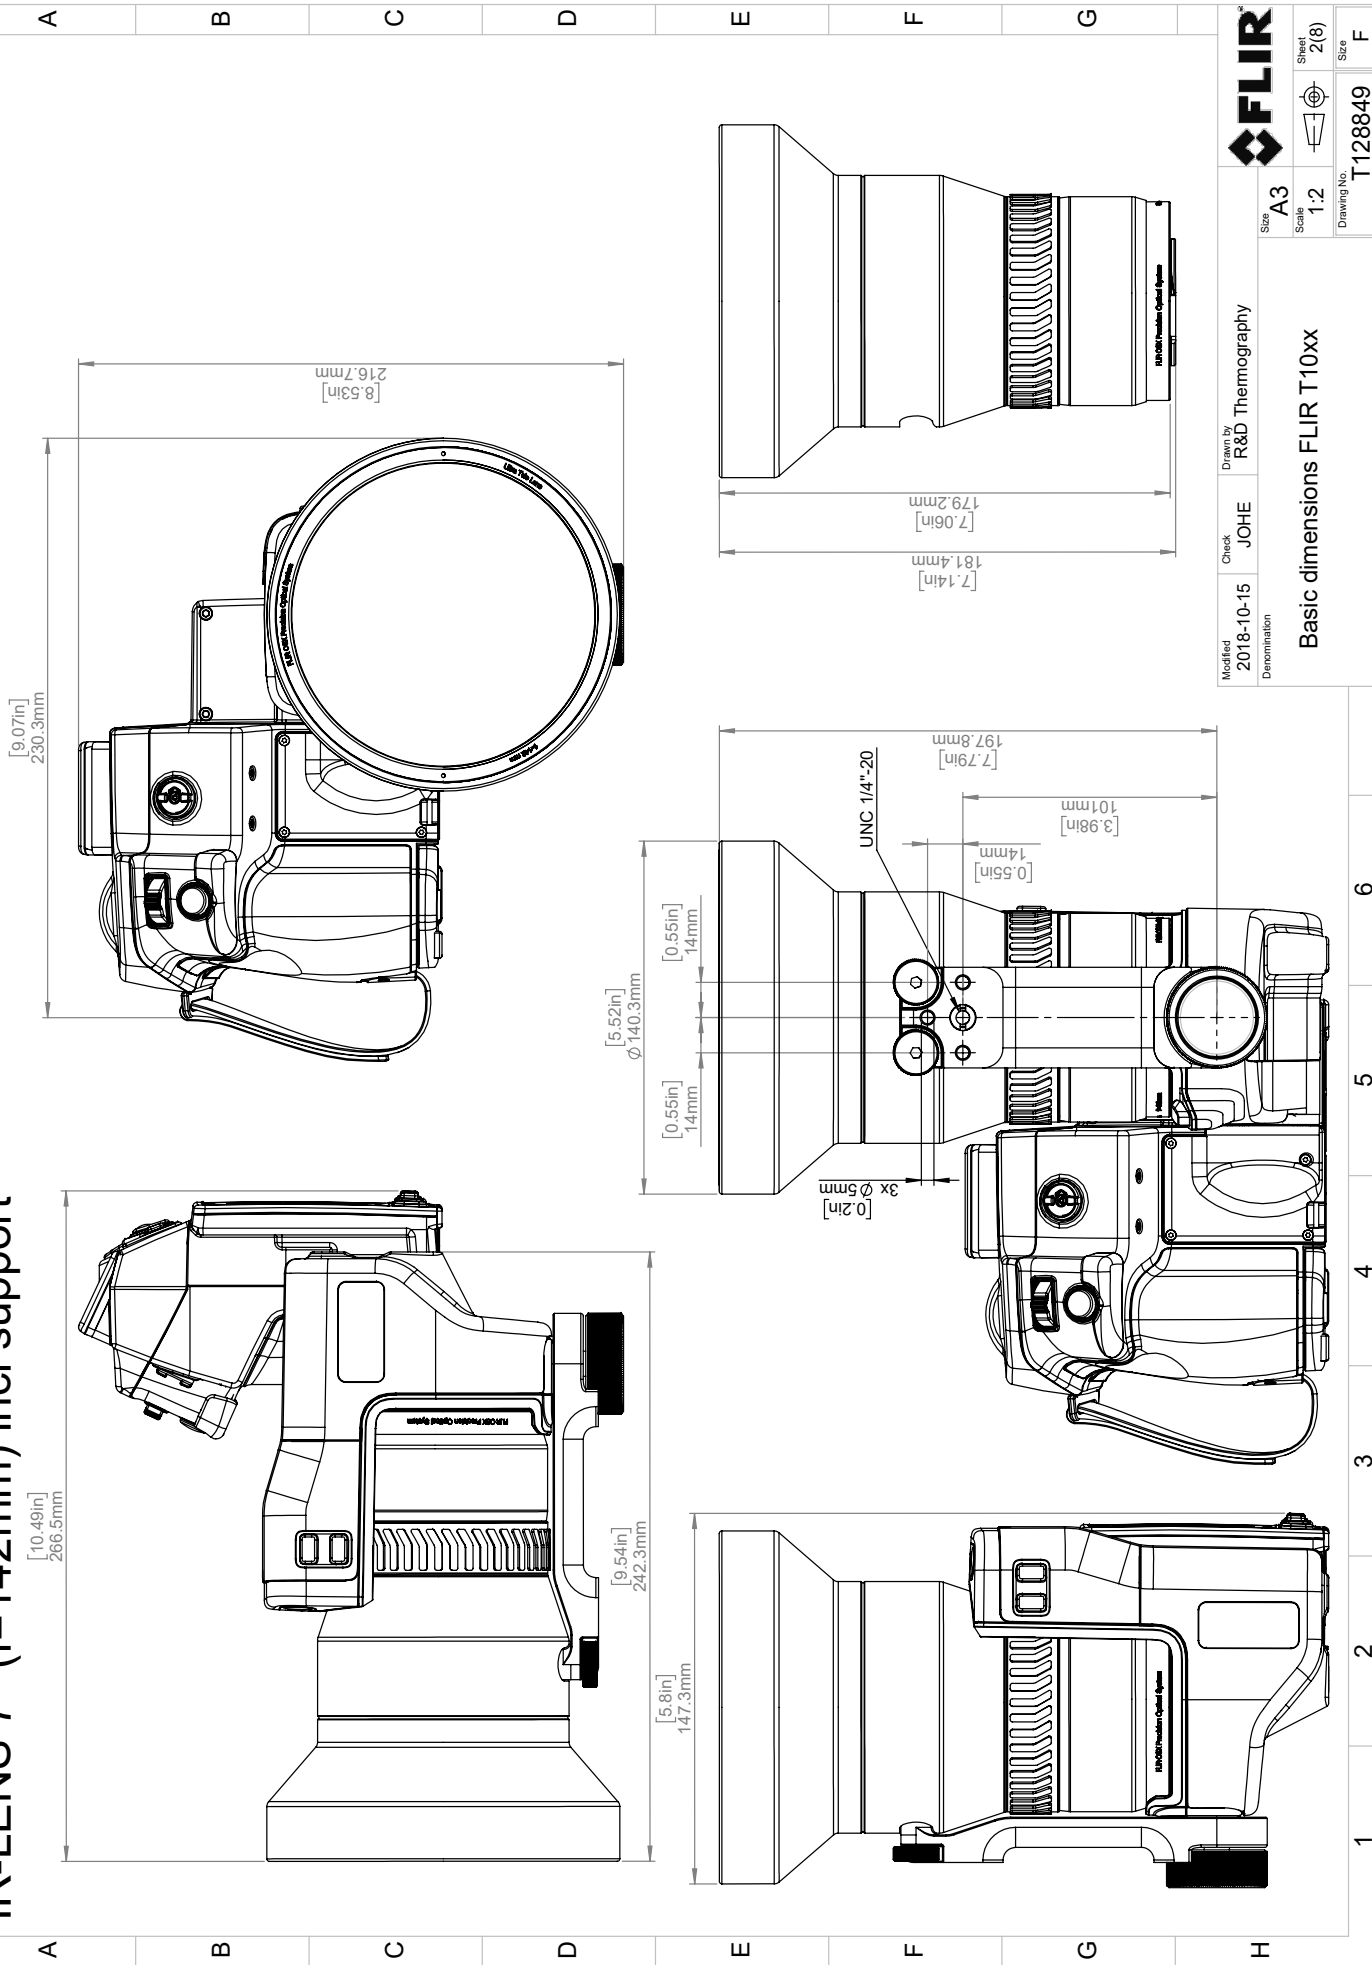

© 2012 FLIR Systems, Inc. All rights reserved worldwide. No part of this drawing may be reproduced, stored in a retrieval system, or transmitted in any form, or by any means, electronic, mechanical, photocopying, recording, or otherwise, without written permission from FLIR Systems, Inc. Specifications subject to change without further notice. Dimensional data is based on nominal values. Products may be subject to regional market considerations. License procedures may apply. Product may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions. Diversion contrary to US law is prohibited.

FLIR		Size: A3
Modified: 2018-10-15	Check: JOHE	Scale: 1:2
Drawn by: R&D Thermography		Sheet: 2(8)
Denomination: Basic dimensions FLIR T10xx		Drawing No.: T128849
		Size: F